



GWH-Series

2ND GENERATION OF HIGH PRESSURE HEAT EXCHANGERS



GWH-Series

Solid and compact design for extreme working conditions.

The GWH-Series are copper-brazed plate heat exchangers designed for industrial applications with pressures of up to 55 bar. Due to their solid and compact construction the units are especially suitable for applications with high mechanical and thermal loads.


They are designed for extreme working conditions, such as CO₂ cascade systems, refrigeration, railway and marine applications.

Always a suitable solution at hand

The brazed plate heat exchangers from Kelvion offer tailor-made solutions for the widest range of application. We configure the most economically favorable model for you from the wide range of available sizes and the numerous optional features. We adapt this with individually positioned connections to meet your specific requirements.

Your advantages at a glance:

- solid construction
- high permanent pressure resistance
- compact, space-saving design
- low weight
- low investment costs

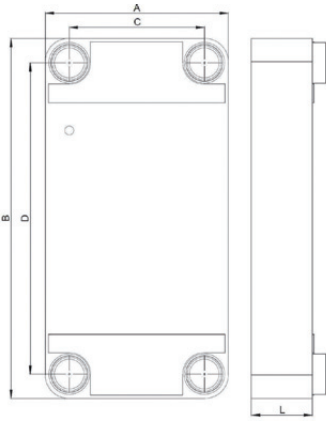

We need following information to select the optimum heat exchanger

- required temperature range
- flow rates or required heat load
- maximal permitted pressure drop
- required working conditions

Type	(bar)	Standard dimensions (mm)				(mm)	(kg)	(Litre/Chanel)	
Plate heat exchanger	Pressure	A	B	C	D	L-Dimension N = number of plates	Mass N = number of plates	Volume	Max. number of plates
GWH 220H	55	90	328	43	279	L=12,20+2,22xN	W=1,30+0,08xN	0,046	80
GWH 240H	55	91	464	43	415	L=12,20+2,20xN	W=2,04+0,14xN	0,070	80
GWH 500H	55	124	532	73	478	L=11,80+2,28xN	W=2,00+0,24xN	0,100	120
GWH 700L	55	271	532	200	460	L=13,30+2,34xN	W=9,60+0,54xN	0,230	150
GWH 700M	55	271	532	200	460	L=13,30+2,35xN	W=9,60+0,54xN	0,230	150
GWH 900H	55	271	802	161	690	L=13,60+2,31xN	W=11,50+0,80xN	0,399	300
Also available as an advanced evaporator with a special "Delta Injection™" distribution system for the refrigerant inlet.									
GWH 500H-AE	55	124	532	73	478	L=11,80+2,28xN	W=2,00+0,24xN	0,100	120
GWH 700M-AE	55	271	532	200	460	L=13,30+2,35xN	W=9,60+0,54xN	0,230	150
GWH 900H-AE	55	271	802	161	690	L=13,60+2,31xN	W=11,50+0,80xN	0,399	300

GWH-Series 2nd. Generation: Specifications

- plate material: Stainless steel AISI 316L / 1.4404
- brazing material: Copper

Features

- Safety Chamber™ (model 700, 900)
- Delta Injection™ (model 500, 700, 900)
- Full-Flow System™ (model 220, 240, 500)

Performance limits

- working temperature: -196°C to +200°C / -321°F to +392°F
- working pressure: up to 55 bar / 798 psi

Approval

- PED (CE)
- ASME VIII-1



The specifications contained in this brochure are intended only to serve the non-binding description of our products and services and are not subject to guarantee. Binding specifications, especially pertaining to performance data and suitability for specific operating purposes, are dependent upon the individual circumstances at the operation location and can, therefore, only be made in terms of precise requests.

Kelvion Brazed PHE GmbH
 Remsaer Straße 2a, 04603 Nobitz-Wilchwitz, Germany
 Phone +49 34 47 55 39-0
 Fax +49 34 47 55 39-30
 sales.nobitz@kelvion.com
 www.kelvion.com

Kelvion PHE GmbH
 Karl-Schiller-Straße 1-3, 31157 Sarstedt, Germany
 Phone +49 50 66 601-0
 Fax +49 50 66 601-134
 sarstedt@kelvion.com